



MORTAR RAKERS

DM




DM MORTAR REMOVAL

DESCRIPTION : A 6mm thick blade with outstanding 12mm segment height. Fast cutting with a long tool life.

USE ME FOR : All types of hard and abrasive mortar.

- 12MM SEGMENT HEIGHT
- STANDARD CORE / KEY HOLE GULETS
- 6MM BLADE WIDTH
- FAST CUTTING & LONG TOOL LIFE
- SINTERED BOND



MATERIAL TYPE

MORTAR RAKING

HARD / DENSE MATERIAL

SOFT / ABRASIVE MATERIAL

GLASS / REINFORCED PLASTIC	
POLYURETHANE	
FIBREGLASS	
MARBLE - DRY CUTTING	
STEEL BARS, PIPE & SECTIONS	
SG & GREY IRON	
PORCELAIN & HARD TILES	
CERAMIC TILES	
INDIAN STONE	
GRANITE	
SLATE	
CLASS A ENGINEERING BRICKS	
CLAY PAVIORS / PIPES / TILES	
FLINT AGGREGATE PRODUCT	
CLASS B ENGINEERING BRICKS	
HEAVILY REINFORCED CONCRETE	
MEDIUM REINFORCED CONCRETE	
LIGHTLY REINFORCED CONCRETE	
CONCRETE	
HARD YORK STONE	
QUARTZITE	
LONDON BRICK	
HARD CONCRETE PRODUCTS	
KERBS / LINTELS / BEAMS	
CAST PIPES	
BRICKS / CONCRETE FLAGS	
HAND MADE BRICKS	
FACING BRICKS	
CONCRETE ROOF TILES	
SOFT CONCRETE PAVIORS	
SAND BASED PAVIORS	
GREEN CONCRETE	
CEMENT SCREED	
LIGHTWEIGHT CONCRETE BLOCK	
HOT ROLLED ASPHALT	
ABRASIVE SAND / GRITSTONE	
ASPHALT OVER CONCRETE	
ASPHALT	
ABRASIVE MORTAR	


MORTAR RAKING

STANDARD

DIMENSIONS	DM
(4 1/2") 115 x 22.2	115DM ∞
(5") 125 x 22.2	125DM ∞

KEY HOLE GULETS

Similar to narrow gullets, key-hole gullets result in less chipping of the material being cut and a reduction in vibration levels.

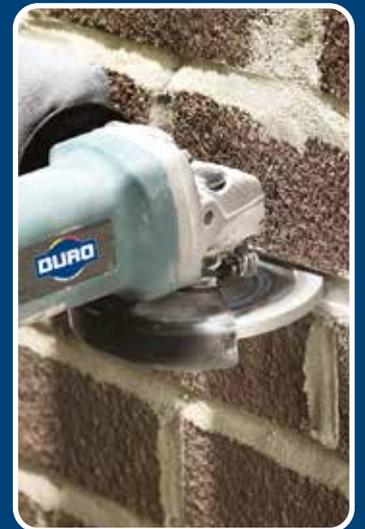

THE STANDARD-LINE FROM DURO, WITH A BROAD PRODUCT RANGE AND MANY TOOLS OFFERING PERFORMANCE LEVELS WELL ABOVE THE INDUSTRY STANDARD, THE OUTPUT OF THESE TOOLS IS VERY GOOD.



HIGHLY SUITED
 NOT SUITABLE
 SUITABLE WITH RESERVATIONS

ORDER LINE: 01909 552470 / 1

WWW.DURO-DIAMONDS.COM

WWW.YOKOTA.CO.UK